



SMALL HOLE DRILLING 小孔凿岩钎具

Integral Equipment


整体钎具

Tapered Equipment

锥度钎具

整体钎 INTEGRAL DRILL ROD

22mm (7/8")

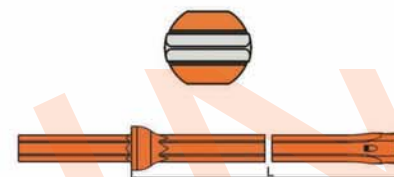

Chisel bit integral.

Rod hex. 22 mm (7/8")

Shank hex. 22 mm (7/8") × 108 mm (4¼").

| 长度 毫米 mm | Length 英尺 ft | 钎头直径 Bit dia.(mm) | 重量 Weight(mm) | Product Code |
|-------------|-----------------|----------------------|------------------|--------------|
| | | | | |

| | | | | |
|------|-------|----|------|------------|
| 800 | 2'7" | 34 | 3.0 | IDR22-0834 |
| 1600 | 5'3" | 33 | 5.2 | IDR22-1633 |
| 2400 | 7'10" | 32 | 8.0 | IDR22-2432 |
| 3200 | 10'6" | 31 | 10.2 | IDR22-3231 |
| 4000 | 13'1" | 30 | 12.9 | IDR22-4030 |
| 4800 | 15'9" | 29 | 15.1 | IDR22-4829 |
| 5600 | 18'4" | 28 | 17.6 | IDR22-5628 |
| 6400 | 21' | 27 | 20.1 | IDR22-6427 |
| 7200 | 23'6" | 26 | 22.5 | IDR22-7226 |

| | | | | |
|------|-------|----|------|------------|
| 800 | 2'7" | 40 | 3.0 | IDR22-0840 |
| 1600 | 5'3" | 39 | 5.2 | IDR22-1639 |
| 2400 | 7'10" | 38 | 8.0 | IDR22-2438 |
| 3200 | 10'6" | 37 | 10.2 | IDR22-3237 |
| 4000 | 13'1" | 36 | 12.9 | IDR22-4036 |
| 4800 | 15'9" | 35 | 15.1 | IDR22-4835 |
| 5600 | 18'4" | 34 | 17.6 | IDR22-5634 |
| 6400 | 21' | 33 | 20.1 | IDR22-6433 |
| 7200 | 23'6" | 32 | 22.5 | IDR22-7232 |


| | | | | |
|------|-------|----|-----|------------|
| 400 | 1'4" | 34 | 1.7 | IDR22-0434 |
| 800 | 2'7" | 33 | 3.0 | IDR22-0833 |
| 1200 | 3'11" | 32 | 4.1 | IDR22-1232 |
| 1600 | 5'3" | 31 | 5.2 | IDR22-1631 |
| 2000 | 6'7" | 30 | 6.7 | IDR22-2030 |

| | | | | |
|------|-------|----|-----|------------|
| 600 | 2' | 41 | 2.4 | IDR22-0641 |
| 1200 | 3'11" | 40 | 4.3 | IDR22-1240 |
| 1800 | 5'11" | 39 | 6.2 | IDR22-1839 |
| 2400 | 7'10" | 38 | 8.0 | IDR22-2438 |

| | | | | |
|------|-------|----|------|------------|
| 400 | 1'4" | 41 | 1.7 | IDR22-0441 |
| 800 | 2'7" | 38 | 3.0 | IDR22-0838 |
| 1200 | 3'11" | 39 | 4.3 | IDR22-1239 |
| 1600 | 5'3" | 36 | 5.2 | IDR22-1636 |
| 1800 | 5'11" | 36 | 6.0 | IDR22-1836 |
| 2000 | 6'7" | 32 | 6.7 | IDR22-2032 |
| 2400 | 7'10" | 27 | 8.0 | IDR22-2427 |
| 3200 | 10'6" | 27 | 10.2 | IDR22-3227 |
| 3200 | 10'6" | 32 | 10.3 | IDR22-3232 |
| 6400 | 21' | 30 | 20.1 | IDR22-6430 |
| 8000 | 26'2" | 26 | 25.0 | IDR22-8026 |

锥度钎具 TAPERED EQUIPMENT

H22 Tapered tools, 7°/11°/12°

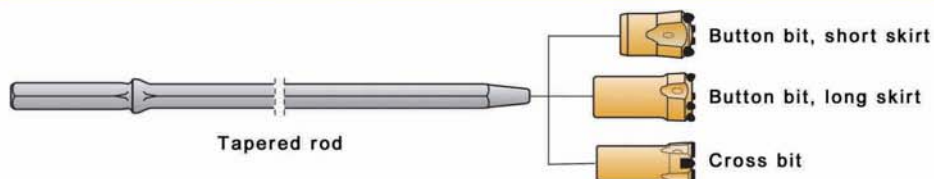

钎头 Drill Bit

| 直径 Dia. | 合金数量*直径 Tip size(mm) | 水孔数量 Flushing hole | 重量 Weight (kg) | Product code |
|------------|-------------------------|-----------------------|-------------------|--------------|
| | | | | |
| 28 1 7/64 | 1*7 3*7 20° | 1 1 | 0.20 | TBB2812-04 |
| 28 1 7/64 | 1*7 4*7 35° | 1 1 | 0.20 | TBB2812-05 |
| 29 1 9/64 | 1*7 3*7 40° | 1 1 | 0.21 | TBB2912-04 |
| 30 1 3/16 | 1*7 3*7 40° | 1 1 | 0.22 | TBB3012-04 |
| 30 1 3/16 | 1*7 4*7 35° | 1 1 | 0.22 | TBB3012-05 |
| 30 1 3/16 | 2*7 4*7 30° | 1 1 | 0.22 | TBB3012-06 |
| 32 1 1/4 | 2*7 5*7 40° | 2 1 | 0.24 | TBB3212-07 |
| 33 1 19/64 | 2*7 5*7 35° | 1 1 | 0.25 | TBB3312-07 |
| 34 1 11/32 | 2*7 5*8 35° | 1 1 | 0.29 | TBB3412-07 |
| 35 1 3/8 | 2*7 4*7 35° | 1 1 | 0.33 | TBB3512-06 |
| 35 1 3/8 | 2*7 5*8 35° | 2 1 | 0.33 | TBB3512-07 |
| 35 1 3/8 | 2*7 5*9 35° | 1 1 | 0.33 | TBB3512-07 |
| 36 1 27/64 | 2*7 5*9 35° | 1 1 | 0.37 | TBB3612-07 |
| 37 1 29/64 | 2*7 5*9 40° | 1 1 | 0.38 | TBB3712-07 |
| 38 1 1/2 | 2*7 3*9 40° | 1 1 | 0.40 | TBB3812-05 |
| 38 1 1/2 | 1*9 5*9 35° | 1 1 | 0.40 | TBB3812-06 |
| 41 1 5/8 | 2*7 5*9 35° | 1 1 | 0.41 | TBB4112-07 |
| 32 1 1/4 | 2*7 5*7 35° | 1 1 | 0.30 | TBB3212-07L |
| 33 1 19/64 | 2*7 5*7 35° | 2 1 | 0.31 | TBB3312-07L |
| 35 1 3/8 | 2*7 6*7 40° | 1 1 | 0.35 | TBB3512-08L |
| 35 1 3/8 | 2*7 5*9 40° | 2 1 | 0.38 | TBB3512-07L |
| 36 1 27/64 | 2*7 5*9 35° | 1 1 | 0.39 | TBB3612-07L |
| 38 1 1/2 | 2*7 5*9 35° | 1 1 | 0.41 | TBB3812-07L |
| 38 1 1/2 | 2*7 6*7 35° | 1 1 | 0.41 | TBB3812-08L |
| 41 1 5/8 | 2*7 5*9 35° | 1 1 | 0.42 | TBB4112-07L |
| 41 1 5/8 | 2*7 6*7 35° | 1 1 | 0.42 | TBB4112-08L |
| 30 1 3/16 | 12*8 - | 1 1 | 0.26 | TCB3012-08 |
| 32 1 1/4 | 12*8 - | 1 1 | 0.30 | TBB3212-08 |
| 33 1 19/64 | 12*8 - | 1 1 | 0.32 | TBB3312-08 |
| 35 1 3/8 | 12*8 - | 1 1 | 0.36 | TBB3512-08 |
| 36 1 27/64 | 12*8 - | 1 1 | 0.39 | TBB3612-08 |
| 38 1 1/2 | 14*8 - | 1 1 | 0.43 | TBB3814-08 |
| 41 1 5/8 | 14*8 - | 1 1 | 0.49 | TBB4114-08 |




Button bit, short skirt



Button bit, long skirt



钎杆 Drill Rod




Shank hex. 22 mm (7/8") × 108 mm (4 1/4").

Rod hex. 22 mm (7/8")

Taper degree 11°/12°

| 长度 Length | 重量 Weight (kg) | Product Code |
|-----------|----------------|----------------------|
| 毫米 mm | 英尺 ft | |
| 610 | 2' | 2.20 H22-11/12-0610 |
| 1220 | 4' | 4.10 H22-11/12-1220 |
| 1830 | 6' | 5.90 H22-11/12-1830 |
| 2000 | 6'7" | 6.40 H22-11/12-2000 |
| 2435 | 8' | 7.80 H22-11/12-2435 |
| 2600 | 8'8" | 8.30 H22-11/12-2600 |
| 3200 | 10'6" | 10.10 H22-11/12-3200 |
| 3655 | 12' | 11.50 H22-11/12-3655 |
| 4000 | 13'1" | 12.60 H22-11/12-4000 |
| 4800 | 15'9" | 14.90 H22-11/12-4800 |
| 5600 | 18'4" | 17.40 H22-11/12-5600 |
| 6400 | 21' | 19.80 H22-11/12-6400 |
| 7200 | 23'6" | 22.20 H22-11/12-7200 |
| 8000 | 26'2" | 24.60 H22-11/12-8000 |



Shank hex. 22 mm (7/8") × 108 mm (4 1/4").

Rod hex. 22 mm (7/8")

Taper degree 7°

| 长度 Length | 重量 Weight (kg) | Product Code |
|-----------|----------------|----------------------|
| 毫米 mm | 英尺 ft | |
| 600 | 2' | 1.93 H22-07/07-0600 |
| 800 | 2'6" | 2.54 H22-07/07-0800 |
| 1000 | 3'3" | 3.15 H22-07/07-1000 |
| 1200 | 3'9" | 3.76 H22-07/07-1200 |
| 1600 | 5'3" | 4.98 H22-07/07-1600 |
| 1800 | 5'9" | 5.59 H22-07/07-1800 |
| 2000 | 6'7" | 6.20 H22-07/07-2000 |
| 2200 | 7'2" | 6.81 H22-07/07-2200 |
| 2400 | 7'9" | 7.42 H22-07/07-2400 |
| 2600 | 8'8" | 8.03 H22-07/07-2600 |
| 3000 | 9'10" | 9.25 H22-07/07-3000 |
| 3500 | 11'5" | 10.78 H22-07/07-3500 |
| 4000 | 13'1" | 12.30 H22-07/07-4000 |
| 4500 | 14'8" | 13.83 H22-07/07-4500 |
| 5000 | 16'4" | 15.35 H22-07/07-5000 |
| 5500 | 18'1" | 16.88 H22-07/07-5500 |
| 6000 | 19'7" | 18.30 H22-07/07-6000 |